

CLIENT:

INTOL s.r.o.

Contact:

Ing. Arch. Mazal, tel. 603448405

REALIZATION PERIOD:

2004 - 2005

PRICE:

31,5 mil. CZK

VOLUMES:


Diaphragm wall 1 480 m²
(th. 80 cm, aver. depth 14 m)

Temp. anchors 1 290 m
(86 units, 4 strands)

Concrete slab

Underpinning by jet-grouting


Earthworks

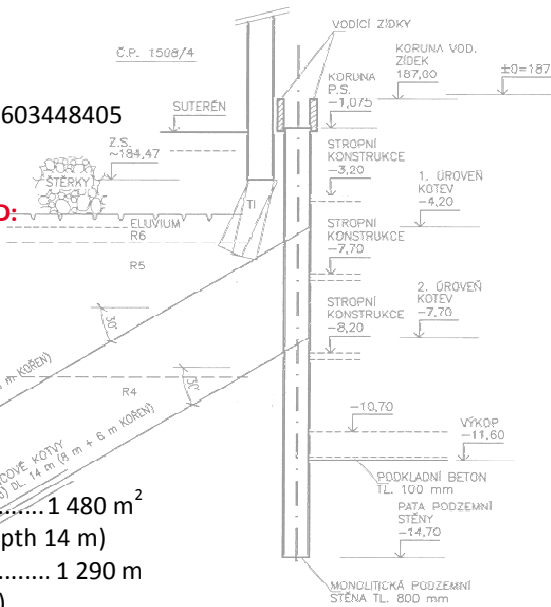

Site works – excavation of diaphragm wall

DESCRIPTION:

Large parking pit in anchored diaphragm walls under future polyfunctional building. Using of hydraulic grab in very hard geology (strength up to 29 MPa). Complementary underpinning of adjacent buildings by jet-grouting.

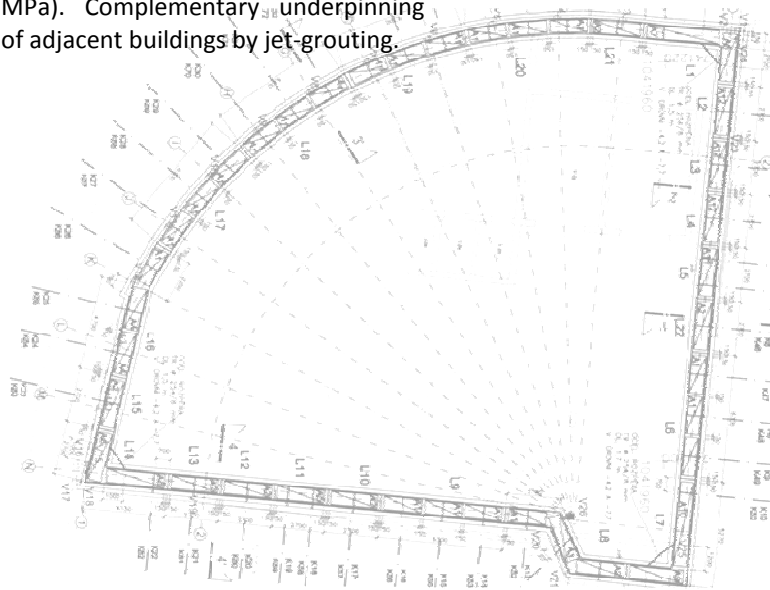

Anchored diaphragm walls