

**CLIENT:**

Odomo s.r.o.

**REALIZATION PERIOD:**

2006

**PRICE:**

9 mil. CZK

**VOLUMES:**


- Steel beams ..... 488,5 m  
(66 units, I 160)
- Temporary anchors ..... 320 m  
(32 units, 2 - 4 strands)
- Shootcrete ..... 420 m<sup>2</sup>  
(th. 100 – 200 mm + net )
- Nailing..... 150 m  
(steel rods 2x R16)
- Slab ..... 800 m<sup>2</sup>
- Excavations ..... 3575 m<sup>3</sup>



*View of the construction pit*

**DESCRIPTION:**

Construction pit in slope execution by anchored berliner-wall, excavations, slab and underground services.

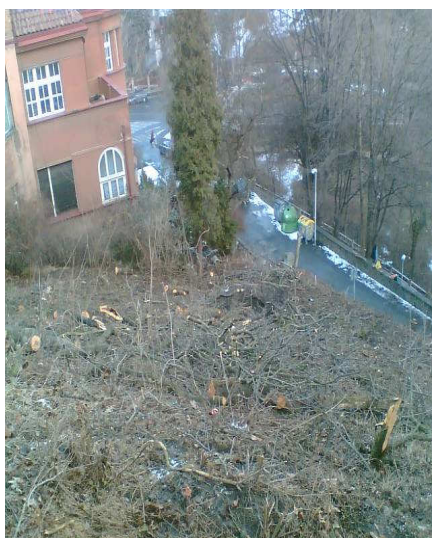

*Jobsite before works*



*Excavation of the construction pit*