

CLIENT:
Chládek a Tintěra, a.s.

REALIZATION PERIOD:
2011



PRICE:
2,1 mil. CZK

VOLUMES:
Jet grouting201,5 m
(diam. 800 mm)

DESCRIPTION:
Cut-off wall by jet grouting in front of supporting wall against scour the foundations and filling space under foundations of supporting wall by jet grouting. Works on temporary embankment in a stream.



JG works in progress

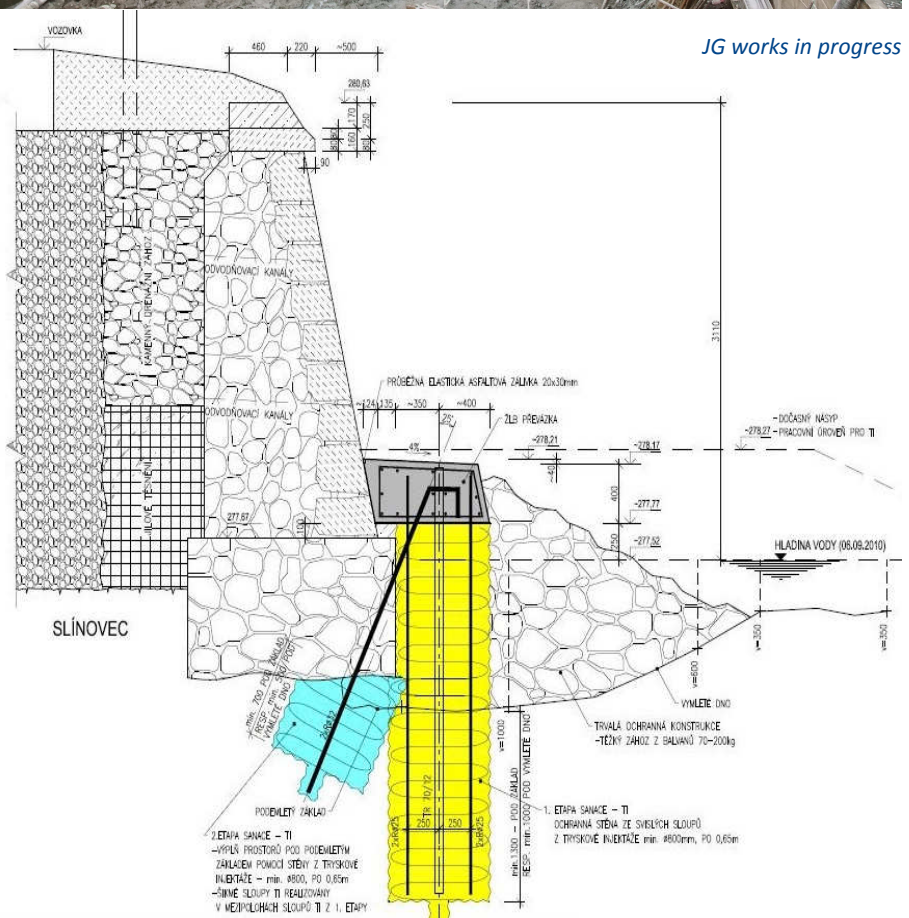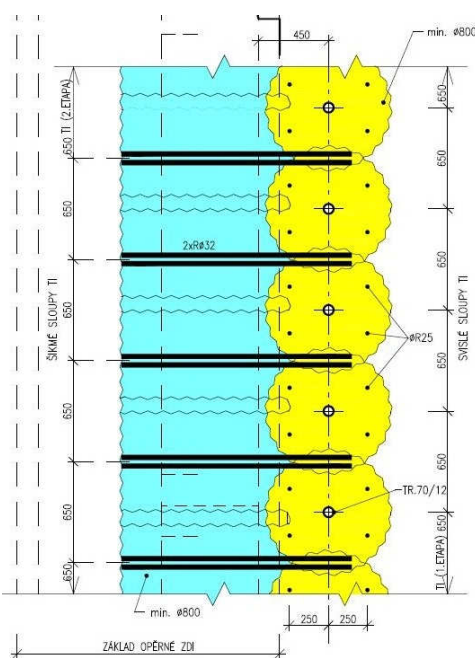

Layout of reconstruction supporting wall